

Wet Alarm Check Valve

Model:ZSFZ




Features

- 1) Ductile iron construction valve body, less weight and extra strength.
- 2) Easy maintenance just require to disassemble the valve cover .
- 3) The all moving parts can be serviced without removing the valve from the installed position.
- 4) Simple design for easy installation and operation.
- 5) Vertical installation.
- 6) CCCF certificated.

Specification

Material	Body	Ductile iron
	Clap	304 Stainless steel with NBR rubber
	Pipes	Galvanized pipe
	Ball valve & strainer	Brass
	Retard Chamber	Carbon steel
	Water motor gong	Carbon steel
Working pressure	16 bar	
Sealing testing pressure	24 bar	
Pressure loss	< 0.2 MPa	
Applicable temperature	4°C to 70°C	
Installation	Vertically	
Flow switch contact capacity	DC24V,5A	
Connection	Flange × Flange	
Available Size	DN80 thru DN250 (3" thru 10")	

Construction

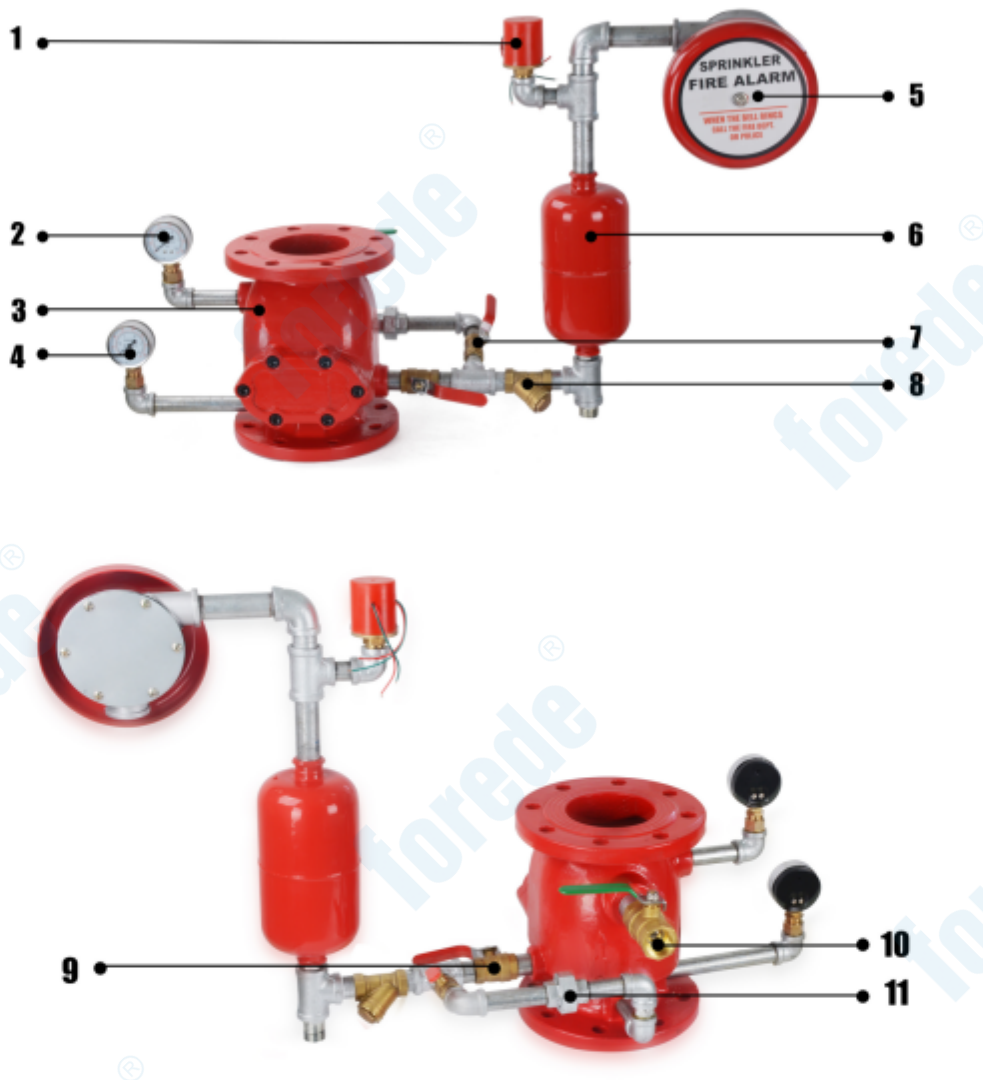

Item Number	Part Name	Item Number	Part Name
1	Pressure Switch	7	Alarm Test Valve
2	System Side Pressure Gauge	8	Alarm pipeline Y-strainer
3	Check Valve Body	9	Alarm Ball Valve
4	Water Supply side Pressure Gauge	10	System Drain Valve
5	Water Motor Alarm Gong	11	Union Coupling
6	Retard Chamber		